

- Intuitive operation
- Customizable background (KX-NT680 only)
- Audio encryption
- Centralized management
- Built-in Bluetooth® (KX-NT680 only)

Making all information visible at a glance is never easy. By using the highly intuitive color LCD screen, every detail is visible with color or icons providing understandable information.

IP communications are becoming more susceptible to attacks. By supporting SRTP we encrypt our communication packets and create a secure and solid communication channel.

KX-NT680/KX-NT630 INTUITIVE IP PHONES

DISPLAY

■ LCD Display	KX-NT680: 4.3 inch Color KX-NT630: 3.6 Inch Monochrome
■ LCD Size (Pixels, Lines)	KX-NT680: 480 x 272 pixels KX-NT630: 6 Lines (Main: 3 lines, FF Key: 3 lines)
■ LCD Contrast	KX-NT680: 4 levels (Backlight Brightness) KX-NT630: 4 levels
■ LCD Backlight	KX-NT680: Auto KX-NT630: On / Auto / Off

INSTALLATION OPTIONS

■ Desk Mount Tilt	Yes (2 positions)
■ Wall Mount Kit	Optional: KX-A435
■ Power Adaptor	Optional: KX-A424

AUDIO FEATURES

■ Volume Level (Handset/Headset/SP Phone)	6 levels
■ Handset	Wideband compliant
■ Speakerphone (HD)	Yes (Full Duplex)
■ Ringtones	30 different
■ Ringer Volume	4 levels & Off
■ Headset Port	2.5 mm audio jack
■ Electronic Hook Switch Control Port	KX-NT680: 3.5 mm Plantronics / Jabra KX-NT630: No
■ Audio Codec	G.722 / G.711 / G.729A

KEYS

■ Soft Keys	KX-NT680: 5 Keys KX-NT630: 4 Keys
■ Programmable Keys (FF Keys)	KX-NT680: 48 (4 pages of 12 keys) KX-NT630: 24 (4 pages of 6 keys)
■ Navigation Key	Yes

FEATURES

■ Color Options	Black, White
■ Auto Redial	Yes
■ OffHook Monitor	Yes
■ Handset/Headset Mic Mute	Yes
■ Speakerphone Mic Mute	Yes
■ Phone Directory	Yes, 100 Entries (personal), 1000 Entries (system)
■ Call Log Entries	Depends on the PBX model or settings
■ Melody Ringer	Yes

NETWORKING

■ Ethernet Ports	2 x 10/100/1000
■ Power over Ethernet (PoE)	Yes (IEEE 802.3af)
■ Bluetooth (Built-in)	Yes (KX-NT680 only)
■ Firmware Upload	Yes
■ Peer-to-Peer Connection	Yes
■ VLAN	Yes
■ QoS (DiffServ)	Yes
■ DHCP Client	Yes
■ VoIP Security	Yes
■ Ping Transmission	Yes
■ IP Port Flexibility	Yes
■ Rerouting to Secondary PBX	Yes
■ NAT Traversal	Yes

SYSTEM REQUIREMENTS

■ Business Communication Server	KX-NS700/700G/1000 v7 or above KX-NSX2000 v4 or above
---------------------------------	--

- The Bluetooth® word mark is a registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic is under license.
- Some models will be available to limited countries.
- The images shown of the base unit display and light are composite images.
- Weights and dimensions are approximate.
- Design and specification subject to change without notice.
- These products may be subject to export control regulations.


LEARN MORE

us.panasonic.com/bts

Panasonic is constantly enhancing product specifications and accessories. Specifications subject to change without notice. Trademarks are property of their respective owners.
©2018 Panasonic Corporation of North America. All rights reserved. KX-NT680/KX-NT630 Spec Sheet_12/18



FULL COLOR LCD SCREEN

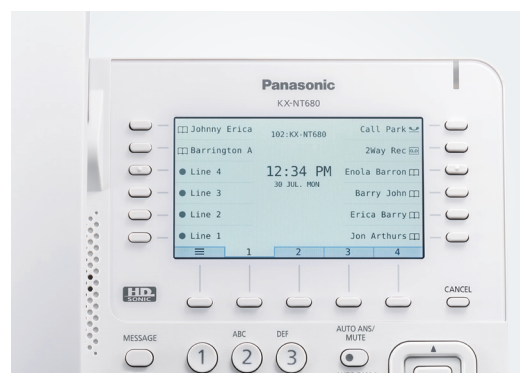

**KX-NT630 &
KX-NT630-B**
Monochrome LCD